

CPT-DFM1 Card
DF Series Inverter Controller Motherboard
Technical Brief

August 2015
Manual Release 1.0
Card Version 2

Copyright © 2015

Creative Power Technologies P/L
P.O. Box 714
MULGRAVE
Victoria, 3170

CREATIVE POWER
TECHNOLOGIES

Tel: +61-3-9543-8805
Fax: +61-3-9543-8802
Email: tech@creativepower.com.au

CPT-DFM1 Manual Revision History

CARD VERSION 1.0: Initial Board for prototype purposes

Internal Prototype Only – No released manual.

CARD VERSION 2: Production Release

Release 1.00 – Initial Manual Release

Table of Contents

CPT-DFM1 Card.....	1
DF Series Inverter Controller Motherboard.....	1
Technical Brief.....	1
1.0 DF Series Overview.....	1
1.1 DF Series Card Range	1
1.1.1 DF Series Control Card:	1
1.1.2 DF Series Peripheral Cards.....	2
1.1.3 DF Series Inverter Motherboard	2
1.2 DF Series Interfaces.....	3
1.2.1 Main Interface.....	3
1.2.2 Communications Interface	3
1.2.3 JTAG Interface	4
2.0 Overview of the CPT-DFM1	5
2.1 Analog Inputs	3
2.2 Digital I/O.....	4
2.3 Position Encoder.....	4
2.4 Gate Drive Interface	4
2.5 Communications	5
2.6 On-card memory (DF Series Microcontroller Platforms).....	5
2.7 Power Supply.....	5
2.8 JTAG/programming.....	5
3.0 Specifications	6
3.1 DF Series Control Card Interface	6
3.2 Analog Inputs	6
3.2.1 Current Inputs	6
3.2.2 AC Voltage Inputs	7
3.2.3 AC/DC Voltage Input	7
3.3 Digital Inputs	8
3.3.1 Isolated Digital Inputs.....	8
3.4 Digital Outputs	8
3.4.1 Isolated MOSFET Outputs	8
3.4.2 Relay Outputs	8
3.5 Position Encoder Digital Inputs.....	9
3.6 PWM Gate Drive Interface	9
3.7 General	10
3.8 Power Supply.....	10
3.9 Order Codes.....	10
Appendices 11	
Appendix A Component Layout	12
Appendix B Texas Instruments Technical Manuals for Control Card MCU	13

DF Series Concept

1.0 DF Series Overview

The DF Series provides a modular, flexible integrated inverter controller platform through a range of interconnected cards. This structure provides an overall reduction in the footprint of the inverter, as well as providing a level of flexibility to support inverters rated from 1kW to 100kW+.

The DF Series Control Card supports Texas Instruments PTP footprint based Piccolo and Delfino Microcontrollers (MCU). Creative Power is actively supporting a subset of these MCU variations as their feature sets are closely aligned. The latest range of MCUs support TI's new integrated analog and control peripherals that are designed to consolidate additional functionality within the MCU.

The modular nature of the DF Series system is seen through the flexible DF Series Interface which connects the DF Series Control Card to a wide range of peripheral cards. These cards include an Inverter Controller and various Communications Peripheral cards. Figure 1-1 shows the general structure of the DF Series stack, with the Control Card mounted to the Inverter Motherboard and any number of Communications Peripheral Cards mounted above.

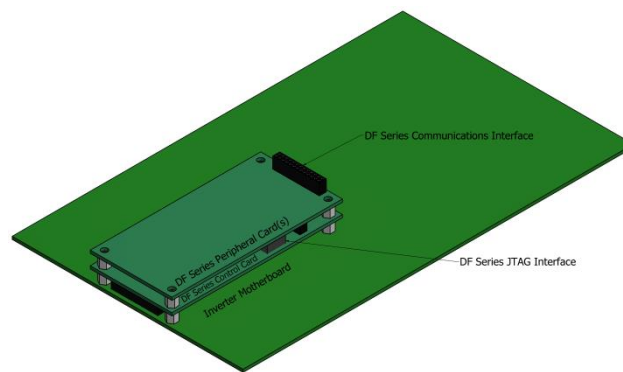


Figure 1-1: DF Series Card Stack Conceptual Overview

1.1 DF Series Card Range

The following is a list of the available cards within the DF Series. Additional cards will be added to the range as they become available.

1.1.1 DF Series Control Card:

The DF Series Control Card is available with the following part numbers:

- **CPT-DF28075 (TMS320F28075PTP MCU Processor)**
- CPT-DF28374S (TMS320F28374SPTP MCU Processor)
- CPT-DF28375S (TMS320F28375SPTP MCU Processor)
- CPT-DF28376S (TMS320F28376SPTP MCU Processor)
- **CPT-DF28377S (TMS320F28377SPTP MCU Processor)**
- CPT-DF28374D (TMS320F28374DPTP MCU Processor)
- CPT-DF28375D (TMS320F28375DPTP MCU Processor)
- CPT-DF28376D (TMS320F28376DPTP MCU Processor)
- **CPT-DF28377D (TMS320F28377DPTP MCU Processor)**

The part number corresponding to the DF Series Control Card must be specified as part of the order. The parts in bold are CPT standard load options.

The Control Card has a footprint of 96mm x 46mm (standard DF Series Footprint size)

1.1.2 DF Series Peripheral Cards

The Peripheral Cards can be mounted within the DF Stack above the Control Card, with interconnection through either the DF Communications Interface or, for the CPT-DFJ, the DF JTAG interface.

All Peripheral Cards are the standard DF Series Footprint size of 96mm x 46mm.

1.1.2.1 CPT-DFC1

CPT-DFC1 Peripheral Card provides external communications interfaces for the Control Card. It interfaces to the Control Card via the 26 way DF Communications Interface.

The CPT-DFC1 Peripheral Card supports the following functionality:

- Dual SCI to Isolated single USB Interface (two serial ports within the one USB connection)
 - USB-A: On-Card DIP Switch Selectable between SCIA and SCIC
 - USB-B: On-Card DIP Switch Selectable between SCIB and SCID
- Isolated CAN Interface
 - On-Card DIP Switch Selectable between CANA and CANB
- Isolated SPI Interface (isoSPI configuration)
 - Direction Selection: On-Card DIP Switch Selectable between Master/Slave
 - Mode Selection: On-Card DIP Switch Selectable Phase and Offset – supporting SPI Modes 0-3
- Real-Time Clock (I²C) with Supercapacitor backup

1.1.2.2 CPT-DFC4

CPT-DFC4 Peripheral Card provides external communications interfaces for the Control Card. It interfaces to the Control Card via the 26 way DF Communications Interface.

The CPT-DFC4 Peripheral Card supports the following functionality:

- Isolated RS422/RS485 Interface
 - On-Card DIP Switch Selectable between SCIB and SCID
 - On-Card DIP Switch Selectable between RS422 and RS485 Mode
- Isolated CAN Interface
 - On-Card DIP Switch Selectable between CANA and CANB
- Isolated SPI Interface (isoSPI configuration)
 - Direction Selection: On-Card DIP Switch Selectable between Master/Slave
 - Mode Selection: On-Card DIP Switch Selectable Phase and Offset – supporting SPI Modes 0-3

1.1.2.3 CPT-DFJ

- JTAG + SCI to Isolated single USB Interface
 - USB based UART Serial Port through MCU Port SCIA
 - USB JTAG Emulation interface for programming and debugging of the Control Card

1.1.3 DF Series Inverter Motherboard

The CPT-DFM1 is Creative Power's next generation high performance MCU based inverter controller motherboard. The CPT-DFM1 has been designed to provide flexibility of connection, combined with a minimum footprint for applications requiring an integrated solution to control up to a four-phase leg VSI stack.

The Inverter Motherboard is compatible with the DF Series Control Cards, and the CPT-DFM1/Control Card Platform combination contains on-card all necessary functions for a complete standalone inverter control system.

The Inverter Motherboard supports up to 8 plug/solder-in gate driver modules, enabling the system to be scaled to an applications specific topology and power rating. The card has the following features:

CPT-DFM1 INVERTER CONTROLLER MOTHERBOARD TECHNICAL BRIEF

- DF Series Main Interface Connectors
- 11 off Conditioned Analog Inputs (Low voltage inputs):
 - 3 off differential AC voltage inputs, (Three-phase 4 wire input compatible)
 - 3 off differential AC/DC voltage inputs
 - 5 off current inputs (AC and DC compatible)
- Isolated Digital I/O
 - 2 off isolated digital inputs (Field supply)
 - 3 off MOSFET switch isolated outputs
 - 2 off relay output, c/o contact
- On-Card Status Indication
 - 1 off Power LED
 - 4 off indication LEDs
 - Each isolated Digital I/O has an on-card status LED
- 4 off DIP switches
- 8 off CPT-Gxx compatible gate driver interface.
 - 3.3V TTL ePWM compatible outputs
 - Driven by ePWM1x to ePWM4x via the DF Series Main Interface
 - 2 sets of 4 fault feedback interrupt
 - Supports CPT's range of CPT-Gxx gate driver boards
 - Switched Gate Driver Supplies to drive isolating transformers on CPT-Gxx gate driver boards
 - Gate Driver Reset signal
- Quadrature Position Encoder input with Index and Strobe
- Push button reset
- On-card logic level supply generation
- Power supply operation from input 24VDC

The CPT-DFM1 card measures 220mm x 130mm.

1.2 DF Series Interfaces

The DF Series is modular in construction, which implies that signals require connection between the various cards. This is achieved using 2mm Dual-inline connectors between the cards within the DF Series Stack.

The Control Card consists of three Interface types:

- DF Series Main Interface (2 x 26-way + 3 x 20-way 2mm Dual-inline connectors)
- DF Series Communications Interface (26-way 2mm Dual-inline connector)
- DF Series JTAG Interface (10-way 2mm Dual-inline connector)

1.2.1 Main Interface

The DF Series Main Interface provides signal connection between the Control Card and Inverter Motherboard (CPT-DFM1). It is located on the underside of the Control Card.

The DF Series Main Interface has been broken up into 5 separate connectors. The Analog connector is located along the left hand edge of the Control Card and Motherboard. The remaining 4 connectors contain digital signals between the Control Card to the Motherboard. Their precise functionality must be specified within the user software to suit the Motherboard.

The Inverter Motherboard is configured as the base of the Main Interface Stack. The Control Card is mounted above the Inverter Motherboard.

1.2.2 Communications Interface

The DF Series Communications Interface provides signal connection between the Control Card and DFC Series Peripheral Cards. The Communications Interface is located along the right hand edge of the DF Series Footprint cards.

CPT-DFM1 INVERTER CONTROLLER MOTHERBOARD TECHNICAL BRIEF

The Control Card is configured as the base of the Communications Interface stack. All Peripherals cards are mounted above the Control Card.

1.2.3 JTAG Interface

The DF Series Control Card has a 10 way connector that interfaces to the isolated CPT-DFJ JTAG and SCI USB card.

The isolated JTAG and SCI board is compatible with TI's default JTAG software EEPROM specification and provides a fully isolated USB JTAG Interface with a Serial Communications Interface to SCIA on the MCU.

CPT-DFM1 Inverter Controller Motherboard

2.0 Overview of the CPT-DFM1

The CPT-DFM1 is Creative Power's next generation high performance MCU based inverter controller motherboard. The CPT-DFM1 has been designed to provide flexibility of connection, combined with a minimum footprint for applications requiring an integrated solution to control up to a four-phase leg VSI stack.

The board is compatible with the DF Series range of Control Cards that are based around the Texas Instruments Piccolo TMS320F2807x and Delfino TMS320F2837xS and TMS320F2837xD MCU range. These Microcontrollers has been specifically developed for use in digital motor/motion control applications, and the CPT-DFM1/Control Card combination contains on-card all necessary functions for a complete standalone inverter control system.

The CPT-DFM1 card measures 220mm x 130mm.

On-card facilities include:

- DF Series Main Interface Connectors
- Conditioned Analog Inputs (Low voltage inputs):
 - 3 off differential AC voltage inputs, (Three-phase 4 wire input compatible)
 - 3 off differential AC/DC voltage inputs
 - 5 off current inputs (AC and DC compatible)
- Isolated Digital I/O
 - 2 off isolated digital inputs (Field supply)
 - 3 off MOSFET switch isolated outputs
 - 2 off relay output, c/o contact
- On-Card Status Indication
 - 1 off Power LED
 - 4 off indication LEDs
 - Each isolated Digital I/O has an on-card status LED
- 4 off DIP switches
- 8 off CPT-Gxx compatible gate driver interface.
 - 3.3V TTL ePWM compatible outputs
 - Driven by ePWM1x to ePWM4x via the DF Series Main Interface
 - 2 sets of 4 fault feedback interrupt
 - Supports CPT's range of CPT-Gxx gate driver boards
 - Switched Gate Driver Supplies to drive isolating transformers on CPT-Gxx gate driver boards
 - Gate Driver Reset signal
- Quadrature Position Encoder input with Index and Strobe
- Push button reset
- On-card logic level supply generation
- Power supply operation from input 24VDC

Figure 2-1 shows a functional block diagram of the CPT-DFM1 card, illustrating all major sections.

CPT- DFM1 INVERTER CONTROLLER BOARD TECHNICAL BRIEF

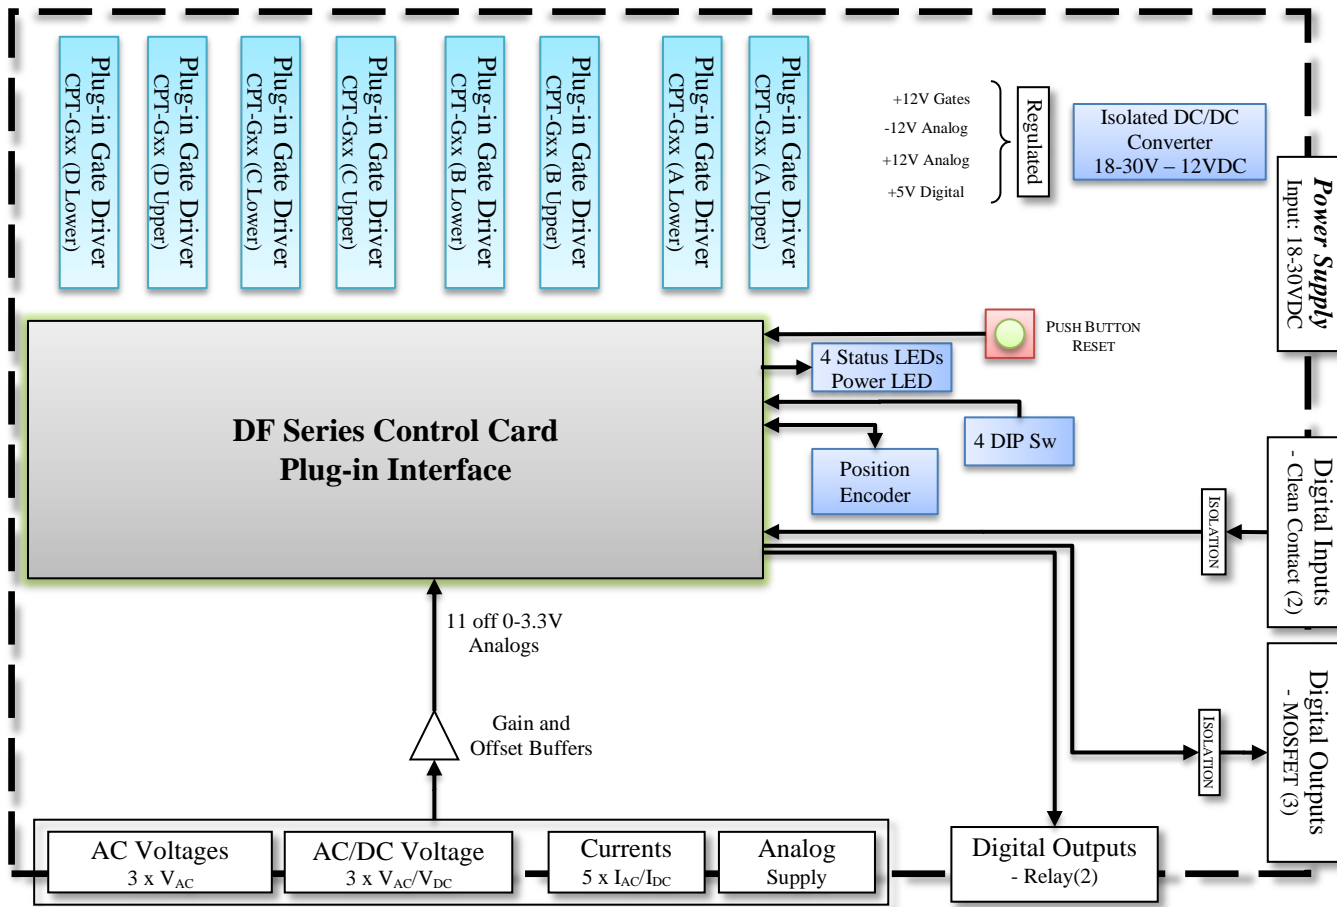


Figure 2-1: Functional Diagram of CPT-DFM1 Inverter Controller Board

2.1 Analog Inputs

The DF Series MCU Platform has ADC inputs that accept voltages in the range of 0 - 3.3V (V_{DDA}). The analog inputs are spread across the four ADC modules (ADCINA2-5, ADCINB1-3, ADCIN14, ADCINC2, ADCINC4 and ADCIND0-2). Each module has an analog multiplexer with its own sample and hold circuit. The output from the sample and hold circuit is fed directly into the Module's 12-bit converter.

Please consult the Texas Instruments documentation on the Analog Subsystem relevant to the MCU Platform used within the system for further information. *TMS320F2807x Piccolo Microcontrollers Technical Reference Manual*, Literature Number: *SPRUHM9*, *TMS320F2837xS Delfino Microcontrollers Technical Reference Manual*, Literature Number *SPRUHX5A* or *TMS320F2837xD Dual-Core Delfino Microcontrollers Technical Reference Manual*, Literature Number *SPRUHM8C*.

There are eleven (11) analog inputs on the CPT-DFM1 board that are configured as 5 off AC/DC currents, 3 off AC voltages and 3 off AC/DC voltages. The signals are conditioned to 0 – 3.3V for the DF Series interface. Two current signals are also fed to the ADCC comparator inputs on the DF Series interface. The MCU Platforms have a low pass “glitch” filter and a diode clamp circuit on each ADC input before the signals are fed into the MCU.

The five current inputs are designed to operate with an off-card CT or LEM module. The current inputs are configured for operation with a voltage input signal, such as supplied from a current transducer. The current inputs are differential signals so that each input can be connected using individual twisted pair wires. An earth shield can be connected to the mounting holes adjacent to the analog inputs. The use of a differential input reduces the impact of cable noise injection on the measured signal. The default configuration for the current inputs has a 2.5V offset built-in so that the voltage range. Current Inputs I1 – I3 have a voltage range of 1.7 and 3.3V, and current inputs I4 – I5 have a voltage range of 2.45 – 3.3V. If a CT or current output LEM modules are used then burden resistors should be placed at the transducer to convert the signal to an equivalent voltage. The offset circuitry on-card would need to be modified to suit. In addition the current inputs have a software configurable overcurrent trip capability using the MCU's comparator subsystem functionality.

The three AC voltage inputs are differential high impedance circuits, allowing line-line AC voltages to be measured from a three-phase four wire system. The board's on-card resistors are rated for a $\pm 10V$ peak, and off-card series resistors should be added for higher voltage ranges.

The three AC/DC voltage inputs are configured for bidirectional voltage input on the default board load. They are a differential high impedance circuit, allowing the voltage to be measured between two floating rails. Each input has an offset stage that can be individually tuned to provide a tailored voltage input range by loading alternative components. The default board load has a $\pm 10V$ voltage range for these inputs.

2.2 Digital I/O

The CPT-DFM1 card supports 15 bits of digital I/O, consisting of 8 bits for local I/O and 7 bits interfacing to external circuitry.

The local I/O consists of 4 bits driving on-card LEDs (**H6, H7, H8, H9**) and 4 bits of DIP switch inputs (**S2**).

The isolated I/O consists of 2 off isolated digital inputs, 2 off relay output (changeover contact) and 3 off isolated MOSFET outputs.

The isolated digital inputs can be driven using the +24V input supply or an off-card supply referenced to the input supply ground. An LED is provided on the isolated side of each input as a visual indication of its state.

The 2 off relay outputs have single pole changeover contacts capable of driving 10A 240Vac or 1A 24Vdc. An LED is provided on the coil side of the output as a visual indication of its state.

The 3 off MOSFET outputs are powered from the +24V input supply. An LED is provided on the isolated side of the output as a visual indication of its state.

2.3 Position Encoder

The position encoder interface accepts quadrature encoded pulses from a relative position encoder system, and passes these pulses to the Quadrature decoder unit (QDU) within the MCU.

A separate index pulse input (QEPI) can be used to generate an interrupt to reset this counter for synchronisation. Typically this is used to indicate absolute position on a once per revolution basis.

A strobe signal input (QEPS) is supported by the eQEP module. This signal typically acts as an indicator that the motor has reached a defined position. It is not required for basic operation of the eQEP interface.

The encoder input signals are +5V TTL compatible, referenced to the on-card ground and diode clamped to avoid damage caused by input over voltages.

2.4 Gate Drive Interface

The TMS320F2807x and TMS320F2837xS/TMS320F2837xD MCUs support up to 12 ePWM Type 4 modules. Each ePWM module represents one complete PWM channel. A channel contains two PWM outputs, defined as EPWMxA and EPWMxB. Specific details of the ePWM Type 4 module functionality is provided within the MCU processor manuals available from Texas Instruments.

The default CPT-DFM1 board supports up to 8 CPT-Gxx gate driver boards. The CPT-Gxx board range is designed to provide a plug-in or solderable isolated gate driver interface that mounts vertically to the CPT-DFM1 base board. This mounting configuration reduces the overall CPT-DFM1 footprint, whilst providing the board with readily replaceable and easily serviceable gate driver module functionality. The on-card gate driver power supply produces the switching voltages for the isolation transformers on the CPT-Gxx gate driver boards.

The gate fault signals from the CPT-Gxx boards are logically ANDed together and fed to the DF Series Main Interface as digital inputs. Each group of 4 gate fault signals is separately fed to a digital input. The MCU can be configured to use these signals to trigger an interrupt upon fault detection.

2.5 Communications

The CPT-DFM1 card does not directly support external communications. These interfaces are available on the DF Series Microcontroller Platform and feed to the Peripheral Communications Cards.

The DF Series Communications Interface supports four communication protocols: four off non-isolated LVTTTL (3.3V) serial communications interfaces (SCI), an LVTTTL synchronous serial peripheral interface (SPI), two off CAN-Bus Ports and an I2C interface.

2.6 On-card memory (DF Series Microcontroller Platforms)

The CPT-DFM1 is designed for operation with a plug-in DF Series MCU Platform.

The DF Series MCU Platforms support up to 512k x 16-bit of on-card Flash, 102k x 16-bit of SARAM, a Boot ROM and 2k x 16 bit OTP Memory.

User programs can be directly executed from RAM, via the CPT-DFJ Isolated USB JTAG interface board or from internal Flash. By default, the control cards execute software from flash memory. Solderable resistor links are provided on the control card to enable selection of the Boot Mode from either a boot loader, RAM, flash, SCI or the SPI.

In addition to the on-chip memory the DF Series MCU Platforms have a 1Mbit SPI interfaced Flash Memory chip for external data storage. Options are available for 2Mbit, 4Mbit, 8Mbit and 16Mbit Serial Flash chips.

2.7 Power Supply

The CPT-DFM1 board is operates from a nominal +24VDC input supply voltage. The board supports operation over the range of +18 to +30VDC.

The card has an isolated DC/DC converter to generate a nominal +12V that is used to create all of the local regulated supplies required by the card. Note that the isolated digital I/O uses the +24V supply for its purposes. Therefore it is strongly recommended to maintain the supply voltage within the acceptable range of operation for the MOSFET digital outputs and clean contact digital inputs.

2.8 JTAG/programming

The DF Series Control Cards are programmable via a JTAG interface. The CPT-DFJ isolated JTAG card provides a JTAG to USB emulator/debugging interface compatible with Texas Instruments Code Composer Studio. This USB interface also contains an SCI port (SCI-A) which can be used as a console.

3.0 Specifications

3.1 DF Series Control Card Interface

Interrupts	<p>The DF Series Main Interface supports interrupts on all GPIO pins.</p> <p>The CPT-DFM1 uses the following pins as interrupts GPIO14 and GPIO15.</p> <p>GPIO14 is the gate fault feedback for CPT-Gxx modules 1 to 4 (active LOW – fault)</p> <p>GPIO15 is the gate fault feedback for CPT-Gxx modules 5 to 8 (active LOW – fault)</p>
------------	--

3.2 Analog Inputs

Number of Channels	17 - TMS320F28075 (maximum of 20 on the TMS320F2837xx)
A/D Resolution	12 bits
A/D Conversion Time	290ns
Number of ADC Modules	3 - TMS320F28075 (4 on the TMS320F2837xx)
Number of S/H units	1 per Module

3.2.1 Current Inputs

Definition	5 off twisted pair 2-wire CT & LEM compatible current inputs
MCU ADC Channels	I1: ADCINA14, I2: ADCINA2, I3: ADCINA4, I4: ADCINA3, I5: ADCINA5
Input Voltage Range	<p>I1 to I3: 1.7 – 3.3V maximum – Assuming zero input corresponds to 2.5V (LTS15-NP full range +/-18.75A peak)</p> <p>I4 to I5: 2.46 – 3.3V maximum – Assuming zero input corresponds to 2.5V (LTS15-NP full range -1/+18.75A peak)</p>
Burden Resistor	Must be mounted off-card. The input must be provided as a voltage.
Voltage Driven LEM	<p>Default: Any offset present in the LEM output must be compensated off-card</p> <p>Option: DNL Resistors on-card for separately conversion of each input to support a +2.5V offset.</p>
Offset	<p>I1 to I3 have a common offset reference– set by R89 at 50% of the rated peak-peak input</p> <p>I4 to I5 have a common offset reference – set by R92 at ~5% of the rated peak-peak input</p>
Overcurrent Protection	<p>Supported via the built-in ADC Comparator operations within the MCU</p> <p>I1 (CMPIN4P), I2 (CMPIN1P), I3 (CMPIN2P), I4 (CMPIN6P), I5 (CMPIN5P)</p>
Supply for Off-card	±12V, +5V available on X9
Dynamic Response	Cut-off frequency >150kHz
PCB Connections	<p>I1 to I3 – 6-way MOLEX 2.54mm (0.1”) connector.</p> <p>Designed for individual twisted pair connection (labelled as X11)</p> <p>I4 to I5 – 6-way MOLEX 2.54mm (0.1”) connector.</p> <p>Designed for individual twisted pair connection (labelled as X10)</p>

CPT-DFM1 INVERTER CONTROLLER BOARD TECHNICAL BRIEF

3.2.2 AC Voltage Inputs

Definition	3 off AC voltage differential analog inputs, V1 to V3: ADCIND0 – ADCIND2
Input Voltage Range	±10 Vac maximum peak (on-card)
Measurement	10V rated Differential Input.
Off-Card Resistors	Differential resistor chains may be added off-card to increase the effective measured voltage range
Zero Crossing Detection	Software configurable via CMPIN7P on VAC1 Software configurable via CMPIN8P on VAC3
Offset	V1 to V3 have a common offset reference. By default it is set to 50% of the input range. V1-V3: Set by R58
Dynamic Response	Cut-off frequency > 450kHz
PCB Connections	4-way MOLEX 2.54mm spacing connector (X13)

3.2.3 AC/DC Voltage Input

Definition	3 off AC/DC voltage differential analog input, V4 to V6: ADCINB3 – ADCINB1 Configured by default for DC input, with 10% reverse polarity detection.
Input Voltage Range	±10 Vac maximum peak (on-card)
Measurement	10V rated Differential Input.
Off-Card Resistors	Differential resistor chains may be added off-card to increase the effective measured voltage range
Offset	V4 to V6 have individual offset references. By default these are set to 50% of the input range. V4: Set by R59 V5: Set by R62 V6: Set by R63
Over-Voltage Detection	Software configurable for V5 on CMPIN3P
Dynamic Response	Cut-off frequency >450kHz
PCB Connections	6-way MOLEX 2.54mm spacing connector (X12)

CPT-DFM1 INVERTER CONTROLLER BOARD TECHNICAL BRIEF

3.3 Digital Inputs

3.3.1 Isolated Digital Inputs

Definition	2 bits of optically isolated digital inputs, clean contact compatible
Minimum Input Voltage	12V DC
Maximum Input Voltage	30V DC
Dynamic Response	0.1ms propagation delay 0-24V rising input 2ms propagation delay 24-0V falling input
Isolation	Optical Isolation Withstand Voltage: 1500V peak (1 minute) Between GND_F and GND. Note that GND_F is the input supply voltage ground. All Isolated Digital Inputs and MOSFET Outputs are on a common ground.
PCB Connections	3-way Phoenix MCV1,5 3.81mm spacing connector, with signal, signal ground and a +24V field supply (X2, X3)

3.4 Digital Outputs

3.4.1 Isolated MOSFET Outputs

Definition	3 off optically isolated MOSFET switched outputs
I_{source}	2.4mA @24V, through 10k Ω pull up resistor
I_{sink}	300mA nominal 1A absolute maximum ^{Note 1}
Switch Configuration	Single pole, normally open. Direct connection to input supply ground
Isolation	Isolation Withstand Voltage to GND: 1500V peak (1 minute) Between GND_F and GND. Note that GND_F is the input supply voltage ground. All Isolated Digital Inputs and MOSFET Outputs are on a common ground.
PCB Connections	3-way Phoenix MCV1,5 3.81mm spacing connector, with signal, signal ground and a +24V field supply (X4, X5, X6).

Note 1: Only one MOSFET output used.

3.4.2 Relay Outputs

Definition	2 off Changeover Relay Outputs
Contact Ratings	240V, 10A AC 30V, 10A DC
Contact Configuration	Single Pole, changeover
Isolation Withstand	3kV AC
Relay Coil Power Supply	Supplied from on-card 12V supply
PCB Connections	3-way Phoenix MCV1,5 3.81mm spacing connector, with normally open, normally closed and common terminals (X8, X7).

3.5 Position Encoder Digital Inputs

Definition	1 pair of quadrature encoded pulses defining relative position change 1 index pulse, 1 strobe pulse
Minimum Input Voltage	0V DC (TTL low)
Maximum Input Voltage	+5V DC (TTL high)
Input Protection	Diode clamped to GND and +5V, Schmitt trigger buffered input, 1k0 input impedance
PCB Connection	6-way MOLEX 0.1" connector, with signals, logical ground and a +12V unisolated supply (X14)

3.6 PWM Gate Drive Interface

Definition	8 PWM Outputs, defined on card as modules ePWM1 to ePWM4. These PWM outputs are connected to the ePWM outputs 1 to 4 available on the DF Series interface. Each PWM output connects to a separate 10 pin CPT-Gxx Interface. The card supports 8 off CPT-Gxx cards.	
ePWM Module	Each ePWM module consists of two PWM outputs (EPWMxA and EPWMxB) that can be used in the following configurations: – Two independent PWM outputs with single-edge operation – Two independent PWM outputs with dual-edge symmetric operation – One independent PWM output with dual-edge asymmetric operation	
Gate Fault Interrupts	Gate Fault signals for ePWM1 and ePWM2 modules are logically ANDed and connected to FAULT1_2*, which can be configured within the MCU to a Trip Zone (TZ) for any of the ePWM modules. Gate Fault signals for ePWM1 and ePWM2 modules are commoned together and connected to FAULT1_2*, which can be configured within the MCU to a trip zone (TZ) for any of the ePWM modules. The PWM signals are placed into a high impedance state and the CPT-Gxx boards have on-card pull-down resistors. CPT-Gxx boards that support gate fault detection have status LEDs to indicate a faulted unit. Trip Zones are interrupts that when activated can immediately disable the ePWM Modules. Response time is a minimum of 3*TBCLK low pulse width on the TZ input for detection.	
Available Gate Driver Cards	CPT-G02	2A Rated IGBT/MOSFET Gate Driver Card
	CPT-G03	6A Rated IGBT/MOSFET Gate Driver Card
	CPT-G04	Thyristor Gate Driver Card
	CPT-G05	Fibre Optic Gate Driver Card
Max IGBT Gate Current	2A peak (CPT-G02)	
PCB Connections	10 pin CPT-Gxx interface: A8 to A1 The CPT-G02 card has a 3 way Phoenix MC 3.81mm spacing connector per gate output with DESAT, Gate and Emitter connections. This relies on the DESAT diode being placed near the switching device. For operation with direct connection to the Collector – the FASTON connector on the CPT-Gxx card should be used	

CPT-DFM1 INVERTER CONTROLLER BOARD TECHNICAL BRIEF

3.7 General

Physical Dimensions	L: 220mm
	W: 130mm
	H: 40mm approx.
Mounting Arrangement	9 off 3.5 mm holes – please consult the mechanical layout diagram in the appendix for full details
Environmental	-20 – 60°C ambient operating temperature 5% - 95% non-condensing humidity

3.8 Power Supply

Input Voltage Range	18 – 30VDC	
Standalone Input Current	1 – 2A (depending on the active sections within the MCU and supply voltage)	
Max Input Power	Approx. 40W	
Protection	1.5A Fuse (F1) for Control Power 1.5A Fuse (F2) for “Field” supply digital I/O Replacement part: Littelfuse 045201.5NRL	
Supplies Generated on-card	GND_GATE (EARTH)	+12V_GATE (+12V) Gate Driver Power Supply
	GND Digital Ground Analog Ground	+12V_DIG (+12V) used for generating digital on-card regulated positive power supplies
		+12V Analog Supply
		-12V Analog Supply
		+5V Digital Supply
		+3.3V Digital
	+2.5V Analog Reference	
Input Power Connector	3-way Phoenix MCV 3,81mm spacing connector with +24V, GND, EARTH. (X1)	

3.9 Order Codes

Part Number Structure	CPT-DFM1-N-Gyy
Base Part Number	CPT-DFM1
Number of Gate Driver Cards (-N)	-1 to -8
Gate Driver Card (-Gyy)	-G02 -G03 -G04 -G05


Example: CPT-DFM1-8-G02
8 CPT-G02 gate driver cards loaded on the base CPT-DFM1 controller.

Appendices

CPT-DFM1 INVERTER CONTROLLER BOARD TECHNICAL BRIEF

Appendix A Component Layout

Top Layer

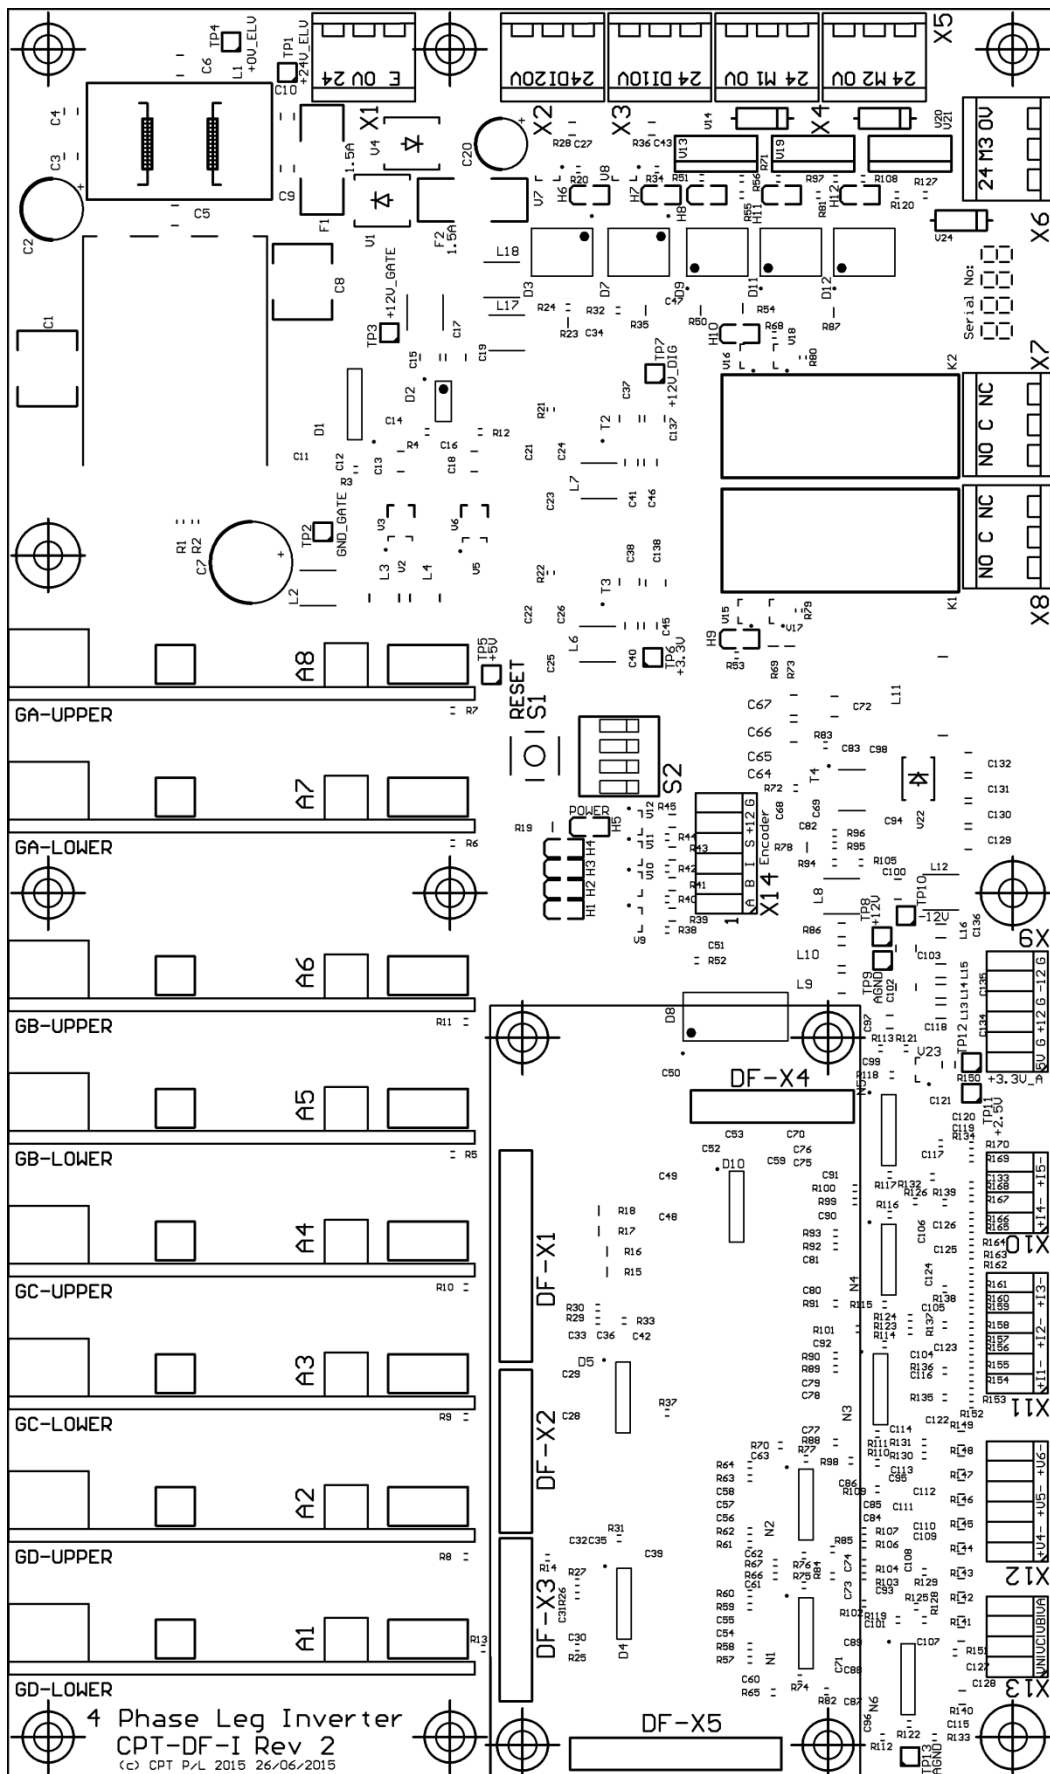

Appendix B Texas Instruments Technical Manuals for Control Card MCU

TMS320F28075PTP Piccolo Microcontroller

Texas Instruments Website: <http://www.ti.com/product/TMS320F28075/technicaldocuments>

Datasheet Document Number: SPRS902
Technical Manual Document Number: SPRUHM9

TMS320F2837xSPTP

Texas Instruments Website: <http://www.ti.com/product/TMS320F28377S/technicaldocuments>

Datasheet Document Number: SPRS881
Technical Manual Document Number: SPRUHX5

TMS320F2837xDPTP

Texas Instruments Website: <http://www.ti.com/product/TMS320F28377D/technicaldocuments>

Datasheet Document Number: SPRS880C
Technical Manual Document Number: SPRUHM8C

ControlSuite

Texas Instruments Website: <http://www.ti.com/tool/controlsuite>